


PRE 1

Universal Camera Sorter



PRECISION SORTING

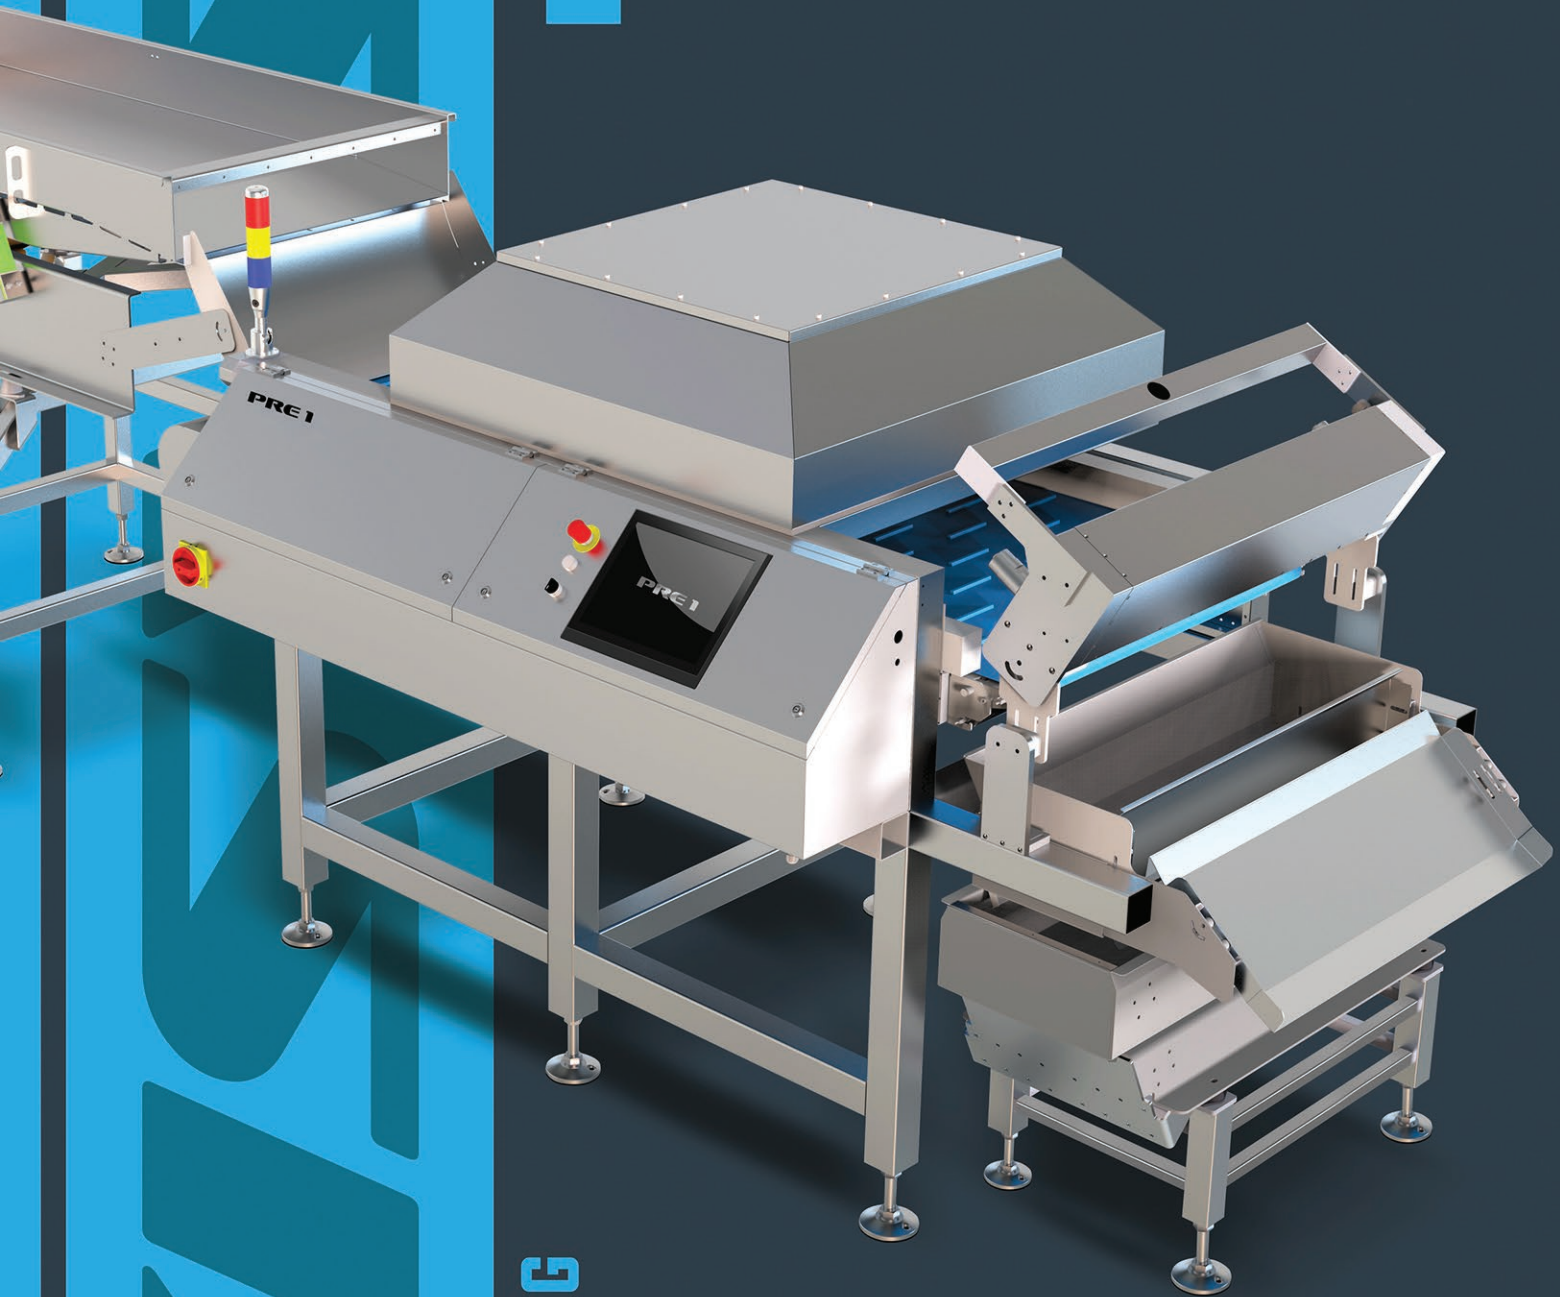

High-Tech



Solid Structure



User Friendly



Fast Service



BENEFITS

- Single side camera scanning
- High color resolution
- High precision on small objects
- Suitable for sticky and non-slip products from vertical ramps
- Can be used for wet or dry products
- Fully stainless steel structure
- Long belt for proper fixing of products to be sorted
- (Optional) Special belt for whole products to be sorted
- Monophase electricity

TECHNOLOGY

- Single side camera scanning unit (top)
- Up to 50.000 scans per second @ 8k resolution
- Special algorithm software
- 90 or 180 air valves
- Network connection
- Touch screen user interface

FUNCTIONAL DIMENSIONS

- 900 mm scanning area

TOTAL MACHINE DIMENSIONS

- W x L x H - 1395 mm x 4714 mm x 1586 mm

CAPACITY

- Capacity varies depending on the density of the product kg / m³
- The product with a density of 1000 kilograms per cubic meter can be nominally sorted at 2.2 tons per hour

REQUIREMENTS

- Electricity 240 Vac / max 10 A
- Pressured Air min 6 bar / max 10 bar
- Air Quality 40 µm filtered oil free, water free, dust free
- Air Consumption typical 200 m³/h
- Air Connection 1 ½ inches

Universal Camera Sorter

PRE 1